



**HAL**  
open science

# Reconfigurable Intelligent Surface Assisted Railway Communications: A survey

Aline Habib, Ammar El Falou, Charlotte Langlais, Marion Berbineau

► **To cite this version:**

Aline Habib, Ammar El Falou, Charlotte Langlais, Marion Berbineau. Reconfigurable Intelligent Surface Assisted Railway Communications: A survey. VTC2023-Spring: IEEE 97th Vehicular Technology Conference, Jun 2023, Florence, Italy. 10.1109/VTC2023-Spring57618.2023.10200574 . hal-04172838

**HAL Id: hal-04172838**

<https://imt-atlantique.hal.science/hal-04172838v1>

Submitted on 28 Jul 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# Reconfigurable Intelligent Surface Assisted Railway Communications: A survey

Aline Habib\*, Ammar El Falou†, Charlotte Langlais\*, Marion Berbineau§

\* Mathematical and electrical engineering department, CNRS UMR 6285 Lab-STICC, IMT Atlantique, Brest, France

† CEMSE Division, King Abdullah University of Science and Technology (KAUST), Saudi Arabia

§ COSYS-LEOST, Universit Gustave Eiffel, Villeneuve d’Ascq, France

Email: {aline.habib, charlotte.langlais}@imt-atlantique.fr, ammar.falou@kaust.edu.sa, marion.berbineau@univ-eiffel.fr

**Abstract**—The number of train passengers and the demand for high data rates to handle new technologies such as video streaming and IoT technologies are continuously increasing. Therefore the exploration of millimeter waves (mmWave) band is a key technology to meet this demand. However, the high penetration loss makes mmWave very sensitive to blocking, limiting its coverage area. One promising, efficient, and low-cost solution is the reconfigurable intelligent surface (RIS). This paper reviews the state of the art of RIS for railway communications in the mmWave context. First, we present the different types of RIS and review some optimization algorithms used in the literature to find the RIS phase shift. Then, we review recent works on RIS in the railway domain and provide future directions.

**Index Terms**—RIS, Railway communications, mmWave.

## I. INTRODUCTION

The need to double the capacity of the existing rail networks and, at the same time to increase the overall quality of service is leading to a drastic increase in the need for high data rates and robust and low latency data exchange between the different actors in the rail system. This multiplication of transmission needs ultimately leads to problems of spectrum scarcity. In this context, using mmWave bands opens up new opportunities. However, mmWaves suffer from very high attenuation and high sensitivity to various masking effects. In this context, Reconfigurable Intelligent Surfaces offers promising application use cases.

Reconfigurable Intelligent Surface, known in the literature by several nomenclatures as Software-Controlled Metasurface [1], Intelligent Reflecting Surface (IRS) [2], Large Intelligent Surface (LIS) [3], and Reconfigurable Smart Surface (RSS) [4], is an electromagnetic-based reconfigurable structure that turns the random nature of the propagation channel into a controllable and programmable radio environment. RIS is a thin planar meta-surface made of several low-cost reflective elements [5]. Each RIS element adjusts the phase and amplitude of the incident wave to reflect it into a beam toward the target direction. This improves the signal quality and extends the coverage area especially when the direct link is blocked. The paper’s main objective is to provide the reader with the basic elements to understand RIS and its interest in a railway communication environment. To do so, we review the literature in the domain and propose some future research directions.

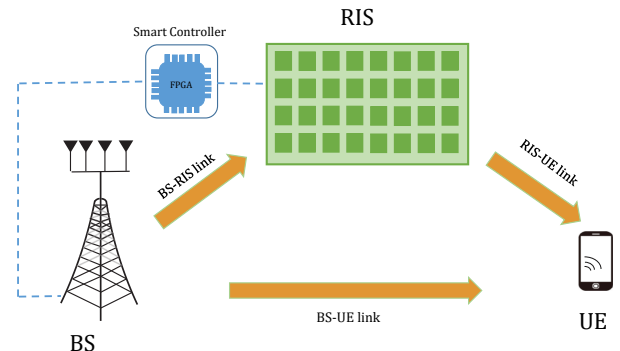


Fig. 1. RIS-assisted Single User MIMO system.

The rest of the paper is organized as follows. Section II provides a literature overview related to RIS, such as the different RIS structures and types, and their opportunity in the context of mmWave communications. We stress the need for realistic channel models in order to properly evaluate the performance of RIS-assisted systems. Section III focuses on very recent works investigating RIS-assisted systems for railway communications. Finally, in Section IV, some future directions are drawn, and Section V concludes the paper.

## II. RECONFIGURABLE INTELLIGENT SURFACE

### A. RIS General Overview

The main objective of a RIS is to provide a programmable radio environment between a transmitter (Tx), typically a base station (BS) in the downlink case, and a receiver (Rx), typically a remote user equipment (UE), by changing the phase shifts and amplitude of the RIS incident wave as follows [6]

$$z_n = \beta_n e^{j\theta_n}, \quad (1)$$

where  $z_n$  is the reflection coefficient of the  $n^{th}$  element,  $\beta_n$  and  $\theta_n$  are the adjustments in amplitude and phase due to the  $n^{th}$  element. As the RIS should not encompass too many RF and signal processing resources to maintain a low level of energy consumption and complexity, the BS computes the needed tunable parameters and transfers commands to each RIS element thanks to a smart controller [7] as seen in Fig.1.

To adjust phase shifts and amplitude of the incident wave, RIS consists of adjustable components, such as diodes and liquid crystals. The diodes adjust the signal by changing the bias voltage, while the liquid crystals adjust the electromagnetic signal by changing material parameters such as conductivity and permeability [8]. Indeed, the PIN diode-based RIS consists of three layers: 1) The outer layer with printed metal patches on a dielectric substrate. This layer directly processes the incident signals. 2) The intermediate layer composed of a copper panel to avoid signal energy loss. 3) The inner layer is a control board activated by a programmable digital electronic circuit (FPGA), allowing the real-time adjustment of the RIS elements' reflection coefficients [8].

Two reflexion paradigms govern propagation in the context of RIS-assisted communication systems, namely, the specular reflection paradigm and the scattering reflection paradigm, [4]. The differences are mainly related to the relation between the size of RIS  $A_t$  and the distance  $D$  between BS-RIS or RIS-UE, as follows:

- The specular reflection paradigm: the transmission occurs in the near-field, i.e.,  $D < d_{lim} = \frac{2A_t}{\lambda}$ . The path loss, in this case, depends on the summation of the distances between BS-RIS and RIS-UE.
- The scattering reflection paradigm: the transmission occurs in the far-field, i.e.,  $D > d_{lim}$ . In this case, the path loss depends on the product of the BS-RIS and RIS-UE separation distances.

In the case of a passive RIS ( $\beta_n \leq 1$ ), the RIS elements reflect the signal without amplification. Thus, in the context of scattering reflection communications (far-field), and by assuming the optimal phase shifts, the received power at the UE for the indirect link via passive RIS is expressed as [4]

$$P_r^{UE} = P_t G_t G_r \left( \frac{\lambda}{4\pi} \right)^4 \frac{(d_0)^{2\mu-4}}{(d_1 d_2)^\mu} N^2 \quad (2)$$

where  $P_t$  is the transmitted power at the BS,  $G_t$  and  $G_r$  are the transmit and receive antenna gains at the BS and the UE, respectively,  $d_0$  the reference distance in the free space,  $d_1$  and  $d_2$  are BS-RIS distance and RIS-UE distance,  $\mu$  is the path loss exponent depending on the environment type (e.g.,  $\mu \geq 3$  for urban environments), and  $N$  is the number of RIS elements. Thus, the passive RIS gives a gain proportional to  $N^2$ . However, the passive RIS has limitations due to the double-path loss effect. Indeed, the signal traverses two cascaded channels, the Tx-RIS link and the RIS-Rx link [9]. Thus, the received power via the indirect link could be greater than the power of the direct link, if  $N$  is large, or/and if the direct link is weak or blocked. To illustrate this concept, we plot in Fig. 2 the power received at the UE via an attenuated direct link, a direct link without attenuation, and the indirect link via the RIS, versus the number of RIS elements. The mmWave channel links are generated using an extended version of the New York University simulator NYUSIM [10].

<sup>1</sup> $d_{lim}$  denotes the Rayleigh distance and is defined by  $d_{lim} = \frac{2A_t}{\lambda}$  with  $A_t$  the RIS area and  $\lambda$  the wavelength [4].

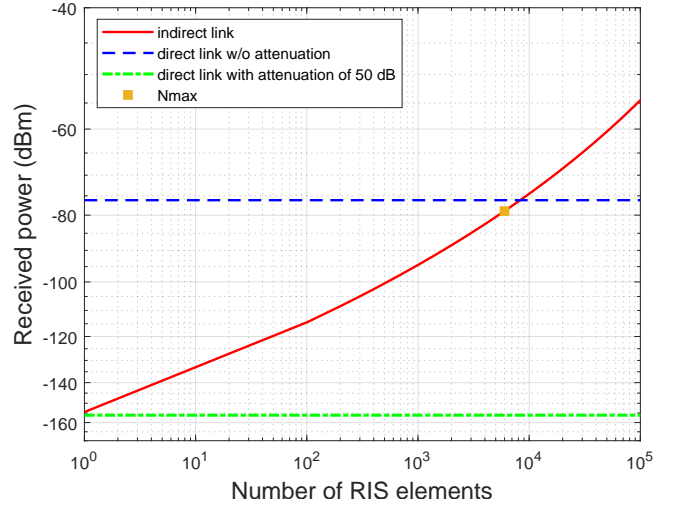


Fig. 2. Received power versus the number of RIS elements for the direct link (distance from BS to UE equal to 158.7 m) with an obstacle of 50 dB attenuation and without obstacles and the indirect link via RIS ( $d_1 = 90$  m;  $d_2 = 30$  m).

Note that to verify the RIS scattering reflection paradigm, the distances  $d_1$ , and  $d_2$  must be in the far-field region. As RIS size increases, the distance where the RIS is in the near-field also increases. Thus, for the distances  $d_1$ , and  $d_2$  to be in the far-field and equation (2) to be valid,  $N$  must not exceed a certain  $N_{max}$ , computed from  $d_{lim}$ , the Rayleigh distance, and represented by a square in Fig. 2 [10]. The behavior of the RIS in the near-field is an interesting research topic.

### B. RIS types

To overcome this limitation and obtain an efficient RIS when the direct link exists or the number of RIS elements is low, the authors of [9] propose an active RIS that can amplify the reflected signals through amplifiers embedded in the RIS elements. The simulation results in a direct link scenario without attenuation for 256 RIS elements reveal a negligible sum-rate gain of 3 % using the passive RIS, while their proposed active RIS offers a significant sum-rate gain of 67 % compared to the case without RIS.

Nevertheless, a RIS with a large number of active elements consumes more energy. Thus, the authors in [11] propose a novel type of RIS composed of active and passive reflective elements, called hybrid RIS, to deal with the limited power budget of the RIS.

RIS based on continuous phase shifts is considered an ideal system that is difficult to implement in practice. Therefore, RIS based on finite discrete phase shifts is the alternative solution to cope with this hardware constraint. To this end, the authors in [12] compare the performance of RIS systems with continuous and discrete phase shifts and they find that 3 levels of quantization are sufficient to obtain full diversity.

### C. RIS optimization

The efficient functioning of the RIS is strongly affected by the adapted phase shifts  $\theta_n$ . For instance, in Single Input

Single Output (SISO) systems, the optimal phase shift of a RIS is easily determined analytically as follows [4]

$$\theta_n = \theta_{tn} + \theta_{nr}. \quad (3)$$

where  $\theta_{tn}$  and  $\theta_{nr}$  are the phase of the LoS path in the BS-RIS and RIS-UE channels, respectively.

However, it is hard to find the optimal phase shifts analytically in the case of Multiple Input Multiple Output (MIMO) systems. To this end, an optimization algorithm is needed. [13] studied multi-user Multi Input Single Output (MISO) downlink communications assisted by RIS, where the objective is to maximize the weighted sum rate to find the optimized passive beamforming  $\theta_n$  and the optimized precoding at the BS. To solve this non-convex problem, they used the Lagrangian Dual Transform which transforms the sum-of-logarithms-of-ratio to an alternative form.

The authors in [14] discussed an indoor MISO multi-user system with a channel model based on the Rician K-factor. The RIS phase shift were configured as follows

$$\theta_n^* = \arg(\mathbf{H}_d^H) - \arg(\mathbf{H}_l^H) - \arg(\mathbf{H}), \quad (4)$$

where  $\mathbf{H}_d$  is the direct channel between the Tx and the Rx,  $\mathbf{H}$  is the channel between Tx and RIS, and  $\mathbf{H}_l$  is the channel between the RIS and the  $l$ th user.

In [15], the authors adopted a low-complex algorithm called the cosine similarity algorithm. The latter aims to find the sub-optimal phase shifts of the RIS that maximize the channel gain. Moreover, to minimize the transmitted power given the bit error rate for a RIS-assisted single-user multipath uplink system, the authors of [16] propose an iterative algorithm to jointly optimize precoding and passive beamforming. In addition, a deep learning algorithm is applied in [17] to maximize the received signal-to-noise ratio and find the optimal phase shifts of RIS.

#### D. RIS versus Relay

Both RIS and relay aim to improve signal quality and coverage. However, there are two main differences.

- In the case of RIS, a power supply is only needed to configure the RIS components based on low-cost materials (diodes, switches...). Once the configuration is done, the RIS becomes passive, and no power supply is needed [18]. However, relays are generally considered active devices connected to active electronics such as analog-to-digital converters, digital-to-analog converters, amplifiers, etc., which require a power supply for operation. As a result, relays are more complex to implement and consume more energy than RIS [19].
- A RIS operates in a full duplex mode while relays generally work in a half-duplex mode. Relays can still operate in full duplex mode, but this increases their cost, since appropriate antennas and analog and/or digital signal processing, to eliminate loop-back self-interference, are required [19].

#### E. RIS is an opportunity for mmWave communications

The mmWave band, ranging from 30 to 300 GHz, offers enormous free bandwidth and high data rate possibilities [20], unlike the overloaded low-frequency spectrum. However, it is very vulnerable to oxygen absorption and rain attenuation, and also suffers from penetration loss that makes mmWave signals easily blocked. Therefore, the coverage of mmWave communications is limited [21]. On the other hand, when the direct link is blocked or largely attenuated, a RIS is a competitive solution to extend coverage area and connectivity [22]. The location of the RIS should be optimized to obtain two efficient connections: the BS-RIS link and the RIS-UE link.

The authors in [23] discuss the size limitation of the RIS in low frequencies below 6 GHz, which makes their deployment in this band inefficient. A study of the specific propagation characteristics of the terahertz band is needed to use RIS in these frequencies, and the most important implementation of RIS today is in the mmWave band.

In the literature, the most used channels in RIS-assisted systems are the theoretical channels such as Rice for Line-of-Sight (LOS) environments, and Rayleigh for non-LOS (NLOS) [13], [24]. To fill the gap towards realistic channel modeling and simulator, the authors in [25] propose a novel geometrical channel simulator, called SimRIS. This simulator is based on statistical modeling and can be used in indoor and outdoor environments at 28 and 73 GHz frequencies. Moreover, in [26] the authors extend QuaDRiGa, a simulator used to model MIMO radio channels at sub-6GHz and mmWave frequencies, to handle RIS. This simulator is convenient for RIS-assisted MIMO systems with a mobile Rx or mobile RIS. In addition, [10] discusses the extension of NYUSIM, a mmWave channel simulator based on extensive measurements and well-used to assess MIMO systems [27]–[29], to generate realistic channels for RIS-assisted systems.

### III. RIS-ASSISTED RAILWAY COMMUNICATIONS

#### A. Railway environments characteristics

Railway environments are known to be very complex and harsh from a radio point of view. Various obstacles such as pylons supporting the catenary and rapid transitions between different scenarios (cutting/tunnel, cutting/viaduct) can create severe radio impairments. Railway tunnel size and shape are very specific, depending on the category of the train. Radio propagation inside tunnels is often modeled using Ray tracing tools [30], [31]. It is also important to mention that MIMO system performance in tunnels is subject to possible impairments depending on spatial correlation in the tunnel and also Key holes phenomenon [32]. Due to high speed, the train can rapidly go through diverse scenarios. In addition, Doppler effects and possible interference due to the proximity of high voltage (catenary) in the vicinity of the antennas render the railway environments very specific compared to the indoor, urban, or suburban environments generally considered today for the use of mmWave communication systems. A detailed

description of railway-specific environments can be found in [32].

Considering the capability of RIS to solve the blockage problems in mmWave wireless communications, the use of RIS for railway communications has recently been considered as a promising candidate.

### B. RIS-assisted railway communications

1) *RIS for high-speed trains:* [33] discusses the need for RIS in High-Speed Railway (HSR) environment for mmWave communications to improve the signal quality, which suffers from frequent blockages due to high-speed trains. The authors apply Deep reinforcement Learning (DRL) based approach to jointly optimize the RIS phase shifts and the BS beamforming for spectral efficiency maximization. The results show a significant improvement in spectral efficiency performance using DRL compared to the traditional approach.

In [34], the authors describe how to use RIS on high-speed trains to improve communication performance by providing beamforming, interference mitigation, and reducing signal attenuation. They present a detailed discussion of the challenges associated with the RIS deployment on these trains, such as the need for tracking of the train, low latency, and high-speed RIS control, and the impact of train vibration on the RIS performance. They also propose the DRL approach to solve the sum rate maximization problem.

[35] deals with interference suppression in an HSR network, composed of a BS, a mobile relay (MR) located on the train, a RIS located near the MR, and an interference source. The authors maximize the channel capacity using a DRL solution and they consider outdated channel state information (CSI) to take into account the motion of the train. The authors found that deploying a RIS in close proximity to the embedded MR improves interference suppression and that their algorithm is more effective in suppressing interference than other optimization algorithms based on mathematical formulations.

[36] proposes a new interrupt flow scheduling approach for RIS-assisted downlink mmWave HSR communications where multiple mobile relays exist. Given the existence of eavesdroppers, the BS schedules a number of flows for each MR when the MR flow quality of service (QoS) exceeds the QoS requirement. The authors seek to maximize the scheduled flow number, find the optimal beamforming, the optimal RIS phase shifts, and the scheduling or not of the RIS discrete phase shift, and they find that RIS can intend communication security by reducing eavesdropping capacity and extending coverage area in the HSR environments.

2) *RIS in railway tunnels:* In [37], the authors have considered a simple two dimensions empty tunnel. Using the image theory approach and a vertical blocking element between a Tx and an Rx inside the tunnel, they have shown that the use of RIS located on the ceiling of the tunnel can reduce the Blocking Probability (BP) of the signal between Tx and Rx. An increase in the number of RIS and optimization of the Tx position conduct to an additional decrease in BP. The increase

in distance between RIS and Tx can extend the effective range of RIS for a given BP. This study could be extended by considering a train inside a 3D tunnel.

3) *RIS for passengers inside trains:* Recently RIS technology has been studied to extend the coverage area in the mmWave band inside an airplane cabin [38]. The authors aim to minimize the number of RIS deployed in this system while ensuring the user data rate remains above a threshold. Besides, they compare the performance of this system for two RIS positions in the cabin corridor near the seat and above the center seat. This study could be easily transposed to the case of the inside of a high-speed train or inside a metro to guarantee a given throughput for the passengers.

## IV. FUTURE DIRECTIONS

As discussed in the previous sections, RIS offers a promising low-cost solution to solve the blocking problems in railway networks since it improves the efficiency and reliability of high-speed trains, solves the interference problem, and extends the coverage area through controlled signal reflection. In the case of high-speed trains, the channel estimation for RIS-assisted communications is a crucial challenge due to the unexpected rapid change of environments. Future research directions could explore the case of RIS-assisted wireless communications in tunnels, especially when the vertical cross-section of the train is large compared to the tunnel cross-section, which increases the probability of signal blockage. In addition, the case where the train moves in the tunnel from the inside to the outside is particularly difficult due to the development of urban transport and in particular driverless metro systems which require high data rate transmissions. The optimization of RIS-assisted communications in this case will require the development of realistic channel models. It would also be interesting to study the optimal location of the RIS, the number of RIS elements, or the number of RIS itself, needed in these systems to maximize the coverage inside the tunnel and also maximize the ever-increasing passenger throughput demand onboard the trains.

## V. CONCLUSION

This paper presents a survey on RIS-assisted communications for railway applications, particularly in the mmWave band. First, we have defined the RIS concept, explaining its structure, and different types of RISs. A review of the various optimization algorithms used in the literature for RIS-assisted systems is proposed, and we highlight the ability of RIS to solve the blocking problem of mmWave. In the last section, the paper outlines the characteristics of the railway environments and details some recent works concerning the use of RIS in high-speed trains. This topic is a very active field of research and we have proposed some future directions for RIS-assisted railway communications.

## ACKNOWLEDGMENT

This work was funded by the council of the Region Bretagne, under the grant MILLIRIS.

## REFERENCES

- [1] C. Liaskos, S. Nie, A. Tsioliaridou, A. Pitsillides, S. Ioannidis, and I. Akyildiz, "A new wireless communication paradigm through software-controlled metasurfaces," *IEEE Commun. Mag.*, vol. 56, no. 9, pp. 162–169, 2018.
- [2] Q. Wu, S. Zhang, B. Zheng, C. You, and R. Zhang, "Intelligent reflecting surface-aided wireless communications: A tutorial," *IEEE Transactions on Communications*, vol. 69, no. 5, pp. 3313–3351, 2021.
- [3] C. Huang, G. C. Alexandropoulos, A. Zappone, M. Debbah, and C. Yuen, "Energy efficient multi-user MISO communication using low resolution large intelligent surfaces," in *2018 IEEE Globecom Workshops (GC Wkshps)*, 2018, pp. 1–6.
- [4] S. Alfattani, W. Jaafar, Y. Hmamouche, H. Yanikomeroglu, and A. Yongaçoglu, "Link budget analysis for reconfigurable smart surfaces in aerial platforms," *IEEE Open Journal of the Commun. Society*, vol. 2, pp. 1980–1995, 2021.
- [5] Q. Wu and R. Zhang, "Towards smart and reconfigurable environment: Intelligent reflecting surface aided wireless network," *IEEE Communications Magazine*, vol. 58, no. 1, pp. 106–112, 2020.
- [6] Y. Liu, X. Liu, X. Mu, T. Hou, J. Xu, M. Di Renzo, and N. Al-Dhahir, "Reconfigurable intelligent surfaces: Principles and opportunities," *IEEE communications surveys & tutorials*, vol. 23, no. 3, pp. 1546–1577, 2021.
- [7] A. S. d. Sena, D. Carrillo, F. Fang, P. H. J. Nardelli, D. B. d. Costa, U. S. Dias, Z. Ding, C. B. Papadias, and W. Saad, "What role do intelligent reflecting surfaces play in multi-antenna non-orthogonal multiple access?" *IEEE Wireless Communications*, vol. 27, no. 5, pp. 24–31, 2020.
- [8] J. Huang, C.-X. Wang, Y. Sun, R. Feng, J. Huang, B. Guo, Z. Zhong, and T. J. Cui, "Reconfigurable intelligent surfaces: Channel characterization and modeling," *Proceedings of the IEEE*, vol. 110, no. 9, pp. 1290–1311, 2022.
- [9] Z. Zhang, L. Dai, X. Chen, C. Liu, F. Yang, R. Schober, and H. Vincent Poor, "Active RIS vs. passive RIS: Which will prevail in 6G?" *IEEE Transactions on Communications*, pp. 1–1, 2022.
- [10] A. Habib, I. Khaled, A. El Falou, and C. Langlais, "Extended NYUSIM-based mmWave Channel Model and Simulator for RIS-Assisted Systems," in *European Conference on Networks and Communications (EuCNC)*, 2023.
- [11] N. T. Nguyen, V.-D. Nguyen, Q. Wu, A. Tlili, S. Chatzinotas, and M. Juntti, "Hybrid active-passive reconfigurable intelligent surface-assisted multi-user MISO systems," in *IEEE Workshop on Signal Processing Advances in Wireless Communications*, 2022.
- [12] P. Xu, G. Chen, Z. Yang, and M. D. Renzo, "Reconfigurable intelligent surfaces-assisted communications with discrete phase shifts: How many quantization levels are required to achieve full diversity?" *IEEE Wireless Communications Letters*, vol. 10, no. 2, pp. 358–362, 2021.
- [13] H. Guo, Y.-C. Liang, J. Chen, and E. G. Larsson, "Weighted sum-rate maximization for reconfigurable intelligent surface aided wireless networks," *IEEE Trans. Wireless Commun.*, vol. 19, no. 5, pp. 3064–3076, 2020.
- [14] M. Issa and H. Artaif, "Using reflective intelligent surfaces for indoor scenarios: Channel modeling and RIS placement," in *Proc. International Conference on Wireless and Mobile Computing, Networking and Communications (WiMob)*, 2021, pp. 277–282.
- [15] Z. Yigit, E. Basar, and I. Altunbas, "Low complexity adaptation for reconfigurable intelligent surface-based MIMO systems," *IEEE Communications Letters*, vol. 24, no. 12, pp. 2946–2950, 2020.
- [16] M. Yue, L. Liu, and X. Yuan, "Practical RIS-aided coded systems: Joint precoding and passive beamforming," *IEEE Wireless Communications Letters*, vol. 10, no. 11, pp. 2345–2349, 2021.
- [17] S. Khan, K. S. Khan, N. Haider, and S. Y. Shin, "Deep-learning-aided detection for reconfigurable intelligent surfaces," *arXiv preprint arXiv:1910.09136*, 2019.
- [18] E. Björnson, Ö. Özdogan, and E. G. Larsson, "Reconfigurable intelligent surfaces: Three myths and two critical questions," *IEEE Communications Magazine*, vol. 58, no. 12, pp. 90–96, 2020.
- [19] M. Di Renzo, K. Ntontin, J. Song, F. H. Danufane, X. Qian, F. Lazarakis, J. De Rosny, D.-T. Phan-Huy, O. Simeone, R. Zhang, M. Debbah, G. Lerosy, M. Fink, S. Tretyakov, and S. Shamai, "Reconfigurable intelligent surfaces vs. relaying: Differences, similarities, and performance comparison," *IEEE Open Journal of the Communications Society*, vol. 1, pp. 798–807, 2020.
- [20] M. Mahbub, M. M. Saym, and M. A. Rouf, "MmWave propagation characteristics analysis for UMa and UMi wireless communications," in *Proc. International Conference on Sustainable Technologies for Industry 4.0 (STI)*, pp. 1–5.
- [21] B. K. J. Al-Shammari, I. Hburi, H. R. Idan, and H. F. Khazaal, "An overview of mmWave communications for 5G," in *Proc. International Conference on Communication & Information Technology (ICICT)*, 2021, pp. 133–139.
- [22] S. Zeng, H. Zhang, B. Di, Z. Han, and L. Song, "Reconfigurable intelligent surface (RIS) assisted wireless coverage extension: RIS orientation and location optimization," *IEEE Commun. Lett.*, vol. 25, no. 1, pp. 269–273, 2021.
- [23] H. Jiao, H. Liu, and Z. Wang, "Reconfigurable intelligent surfaces aided wireless communication: Key technologies and challenges," in *Proc. International Wireless Communications and Mobile Computing (IWCMC)*, 2022, pp. 1364–1368.
- [24] I. Trigui, W. Ajib, W.-P. Zhu, and M. D. Renzo, "Performance evaluation and diversity analysis of RIS-assisted communications over generalized fading channels in the presence of phase noise," *IEEE Open Journal of the Communications Society*, vol. 3, pp. 593–607, 2022.
- [25] E. Basar and I. Yildirim, "Reconfigurable intelligent surfaces for future wireless networks: A channel modeling perspective," *IEEE Wireless Commun.*, vol. 28, no. 3, pp. 108–114, 2021.
- [26] S. Dorokhin, P. Lysov, A. Aderkina, and V. Lyashev, "Reconfigurable intelligent surface MIMO simulation using quasi deterministic radio channel model," *arXiv preprint arXiv:2211.12601*, 2022.
- [27] M. El Hassan, A. El Falou, and C. Langlais, "Performance assessment of linear precoding for multi-user massive MIMO systems on a realistic 5G mmWave channel," in *Proc. IEEE Middle East and North Africa COMMUNICATIONS Conference (MENACOMM)*, 2018.
- [28] I. Khaled, A. El Falou, C. Langlais, B. ElHassan, and M. Jezequel, "Performance evaluation of linear precoding mmWave multi-user MIMO systems with NYUSIM channel simulator," in *Proc. IEEE Middle East and North Africa COMMUNICATIONS Conference (MENACOMM)*, 2019.
- [29] I. Khaled, C. Langlais, A. El Falou, B. Elhassan, and M. Jezequel, "Multi-user angle-domain MIMO-NOMA system for mmWave communications," *IEEE Access*, vol. 9, pp. 129 443–129 459, 2021.
- [30] H. Qiu, J. M. Garca-Loygorri, K. Guan, D. He, Z. Xu, B. Ai, and M. Berbineau, "Emulation of radio technologies for railways: A tapped-delay-line channel model for tunnels," *IEEE Access*, vol. 9, pp. 1512–1523, 2021.
- [31] D. He, B. Ai, K. Guan, Z. Zhong, B. Hui, J. Kim, H. Chung, and I. Kim, "Channel measurement, simulation, and analysis for high-speed railway communications in 5G millimeter-wave band," *IEEE Transactions on Intelligent Transportation Systems*, vol. 19, no. 10, pp. 3144–3158, 2018.
- [32] M. Berbineau, R. Behaegel, J. M. Garcia-Loygorri, R. Torrego, R. D'Erico, A. Sabra, Y. Yan, and J. Soler, "Channel models for performance evaluation of wireless systems in railway environments," *IEEE Access*, vol. 9, pp. 45 903–45 918, 2021.
- [33] J. Xu and B. Ai, "When mmWave high-speed railway networks meet reconfigurable intelligent surface: A deep reinforcement learning method," *IEEE Wireless Communications Letters*, vol. 11, no. 3, pp. 533–537, 2022.
- [34] J. Zhang, H. Liu, Q. Wu, Y. Jin, Y. Chen, B. Ai, S. Jin, and T. J. Cui, "RIS-aided next-generation high-speed train communications: Challenges, solutions, and future directions," *IEEE Wireless Communications*, vol. 28, no. 6, pp. 145–151, 2021.
- [35] J. Xu, B. Ai, T. Q. S. Quek, and Y. Liuc, "Deep reinforcement learning for interference suppression in RIS-aided high-speed railway networks," in *Proc. IEEE International Conference on Communications Workshops (ICC Workshops)*, 2022, pp. 337–342.
- [36] P. Li, Y. Niu, H. Wu, Z. Han, B. Ai, N. Wang, and Z. Zhong, "RIS-assisted scheduling for high-speed railway secure communications," *IEEE Transactions on Vehicular Technology*, pp. 1–15, 2022.
- [37] C. Chen and C. Pan, "Blocking probability in obstructed tunnels with reconfigurable intelligent surface," *IEEE Communications Letters*, vol. 26, no. 2, pp. 458–462, 2022.
- [38] Z. Li, O. A. Topal, Ö. T. Demir, E. Björnson, and C. Cavdar, "mmWave coverage extension using reconfigurable intelligent surfaces in indoor dense spaces," *arXiv preprint arXiv:2302.09257*, 2023.