

Proton beam dosimetry at ultra high dose rates: evaluation of the usability and the dose rate dependency of various radiochromic films

Daphnée Villoing, Charbel Koumeir, A. Bongrand, Arnaud Guertin, Ferid Haddad, Vincent Métivier, Freddy Poirier, Vincent Potiron, Noël Servagent, Stéphane Supiot, et al.

▶ To cite this version:

Daphnée Villoing, Charbel Koumeir, A. Bongrand, Arnaud Guertin, Ferid Haddad, et al.. Proton beam dosimetry at ultra high dose rates: evaluation of the usability and the dose rate dependency of various radiochromic films. 1st FLASH Radiotherapy and Particle Therapy Conference (FRPT 2021), Dec 2021, Vienna and online, Austria. . hal-03934494

HAL Id: hal-03934494 https://imt-atlantique.hal.science/hal-03934494v1

Submitted on 11 Jan 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Proton beam dosimetry at ultra high dose rates: evaluation of the usability and the dose rate dependency of various radiochromic films.

Institut de **c** Cancérologie o de l'Ouest



D. Villoing¹, C. Koumeir², A. Bongrand², A. Guertin³, F. Haddad^{2,3}, V. Metivier³, F. Poirier², V. Potiron¹, N. Servagent³, S. Supiot¹, G. Delpon¹, S. Chiavassa¹

¹ Institut de Cancérologie de l'Ouest, Saint-Herblain, France ² GIP ARRONAX, Saint-Herblain, France ³ Laboratoire SUBATECH, UMR 6457, CNRS IN2P3, IMT Atlantique, Université de Nantes, France

BACKGROUND

At the ARRONAX facility, the C70XP cyclotron offers the possibility to deliver proton beams from low to ultra-high dose rates (UHDR), thanks to a homemade pulsing chopper-based system [1]. Our beamline, tuned for 68 MeV, is adapted to preclinical irradiations and specifically set up to easily shift between conventional/UHDR irradiation conditions.

AIM

To evaluate the dose rate dependency of several radiochromic films commonly used for dosimetry in radiotherapy, considering various mean dose rates, linear energy transfers (LET) and beam structures.

MATERIAL & METHODS

Experimental setup

A 52-um tungsten foil (TF) and two Al collimators (C1 Ø 15 mm, C2 Ø 10 mm) were used to spread and homogenize the proton beam.

Doses from UHDR irradiations were calculated using electric charge readings from a photomultiplier (PM) tube. Doses from conventional (conv) irradiations were calculated using readings from a parallel-plate ionization chamber (IC). Both detectors were calibrated using a Faraday cup (FC).

The proton beam spot has a 10-mm diameter at the target position.




Figure 1: Proton beam experimental setup.

Radiochromic films

Three types of radiochromic films were compared: GAFchromic™ EBT3 [2] and EBT-XD [3], OrthoChromic OC-1 [4]. They were digitized between 24 and 48h after their irradiation. Their response was assessed using the net optical density (NetOD).

Experiments

Films were stacked in the same order along the beam axis: EBT3 / EBT-XD / OC-1. The positioning of each irradiation was remotely controlled using an in-house automatic XY translator. Three types of experiments were performed:

> #1 - Comparison conventional/UHDR irradiations + variation of the LET

#2 - Variation of the mean dose rate.

#3 - Variation of the beam structure




Figure 2: Beam structure variations for experiments #1, #2 and #3.

	Mean dose rate (Gy/s)	Intra-pulse dose rate (Gy/s)	# pulses	Pulse width (ms)	Repetition frequency (Hz)
#1	7500	7500	1	0.27 – 16.67	-
	0.25	6.3	800 – 50000	0.4	100
#2	40	40	1	75 – 3000	-
	1500	1500	1	2 – 80	-
	7500	7500	1	0.27 – 16.67	-
#3	40	7500	4 – 160	0.1	53.3
	1500	7500	4 – 160	0.1	2000

Table 1: Beam structures of experiments #1, #2 and #3.

RESULTS

- 1. Significant differences of response (NetOD_{UHDR} > NetOD_{CONV}) between 0.25 Gy/s (conv) and 7500 Gy/s (UHDR) for EBT3 and EBT-XD films, above 10 Gy.
- 2. No significant difference of response between 0.25 Gy/s and 7500 Gy/s for OC-1 films, except below 3 Gy.
- 3. Similar differences of response between conventional and UHDR conditions for different LETs. for all films.
- 4. NetOD increase with mean dose rate for EBT3 films. more especially between 1500 and 7500 Gy/s.

- 5. Significant differences in netOD between 40 Gy/s and 7500 Gy/s for EBT-XD films above 16 Gv.
- 6. No impact of the mean dose rate for OC-1 films between 40, 1500 and 7500 Gy/s, except below 3 Gy.
- 7. No significant difference based on the beam structure, between a single macro-pulse and multiple macro-pulses delivery at either 40 or 1500 Gy/s, for all three types of films.

CONCLUSIONS

- EBT3 and EBT-XD films should be used with caution for the dosimetry of UHDR proton beams.
- In our future UHDR experiments, we will use EBT3 or EBT-XD films up to 10 Gy, and OC-1 films between 10 and 100 Gy.
- The dose rate dependency of OC-1 films should be evaluated at UHDR > 7500 Gy/s
- A broader investigation of the usability of OC-1 films for the dosimetry of UHDR proton beams should be conducted at other beam energies.

REFERENCES

- [1] Poirier F et al. The Pulsing Chopper-Based System of the Arronax C70XP Cyclotron. Proc 10th **IPAC 2019**
- [2] Ashland. Gafchromic EBT3 specifications. 2020. http://www.gafchromic.com/documents/EBT3 Sp ecifications.pdf
- [3] Ashland. Gafchromic EBT-XD specifications. 2020.

http://www.gafchromic.com/documents/EBTXD S pecifications.pdf

[4] Micke A, Yu X. OrthoChromic Film Dosimetry Published 2020. Protocol. http://www.orthochromic.com/OC/Documents/O CI Protocol 2020 Full.pdf

This work was partially funded by Equipex ARRONAX-Plus (ANR-11-EQPX-0004), Labex IRON (ANR-11-LABX-18-01), ISITE NEXT (ANR-16-IDEX-0007), and with financial support from Inserm Cancer.

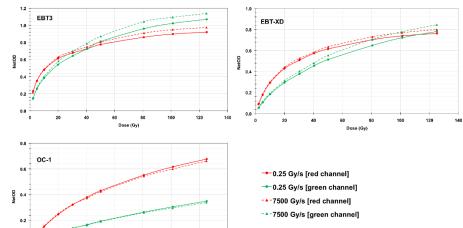


Figure 3: Difference of response between 0.25 Gy/s and 7500 Gy/s, using red and green channels of EBT3, EBT-XD and OC-1 films.