



## Toward an integrated NWP-DA-AI system for 30-second-update precipitation prediction

Shigenori Otsuka, Yasumitsu Maejima, Pierre Tandeo, Takemasa Miyoshi

### ► To cite this version:

Shigenori Otsuka, Yasumitsu Maejima, Pierre Tandeo, Takemasa Miyoshi. Toward an integrated NWP-DA-AI system for 30-second-update precipitation prediction. ECMWF-ESA Workshop on Machine Learning for Earth System Observation and Prediction, Oct 2020, Virtual Conference, United Kingdom. hal-02967547

**HAL Id: hal-02967547**

**<https://imt-atlantique.hal.science/hal-02967547>**


Submitted on 15 Oct 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



# Toward an integrated NWP-DA-AI system for 30-second-update precipitation prediction

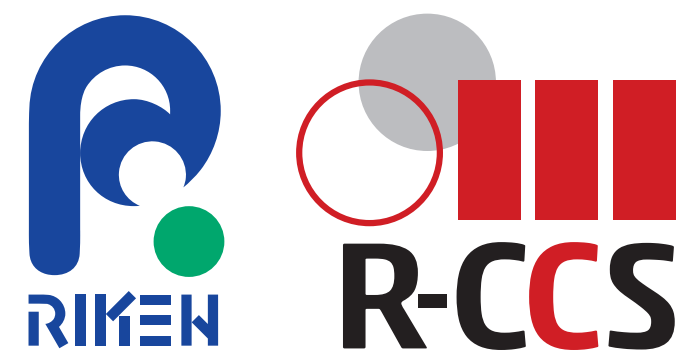


Shigenori Otsuka (RIKEN), Yasumitsu Maejima (RIKEN),  
Pierre Tandeo (IMT Atlantique), and Takemasa Miyoshi (RIKEN)



## 1. Introduction

- Phased-Array Weather Radar (PAWR) at NICT Kobe
  - Every 30 seconds, 60-km-range, 100-m range resolution, 300 azimuth, 110 elevation
- A high-resolution regional NWP system (SCALE-LETKF, Miyoshi et al., 2016a,b, Lien et al., 2017)
- 3D optical flow nowcast: <https://weather.riken.jp/> (Otsuka et al. 2016, *WAF*)
- A deep-learning-based system to merge observations and forecasts is newly developed.

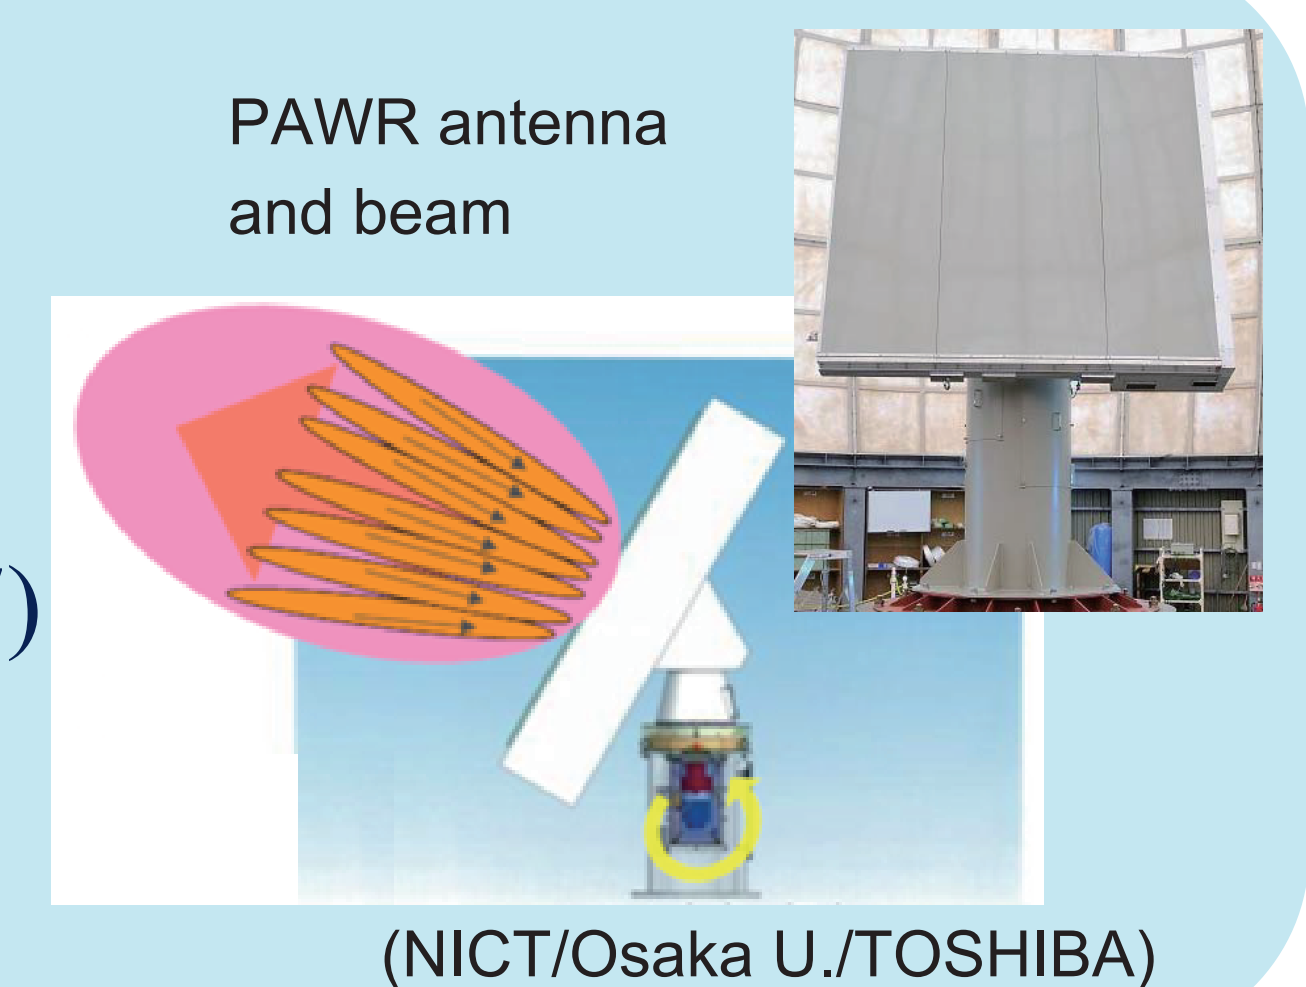


(NICT/Osaka U./TOSHIBA)

## 2. Deep-learning-based system

- Based on Conv-LSTM (Shi et al. 2015, *NIPS*)
  - Long Short Term Memory (Hochreiter & Schmidhuber 1997, *Neural Comp.*)
    - Suitable for time series
  - Convolution: taking account of spatial pattern
  - Weights: copied from the encoder to the forecaster
  - Conv-LSTM outperforms CNN for two-dimensional precipitation nowcasting
- Extended to three-dimensional data
- Future data are used in the decoder network


### Machine learning with 3D Conv-LSTM

- Long Short-Term Memory is suitable for sequence data (Hochreiter & Schmidhuber 1997)
- Convolutional neural network is combined (Shi et al. 2015)

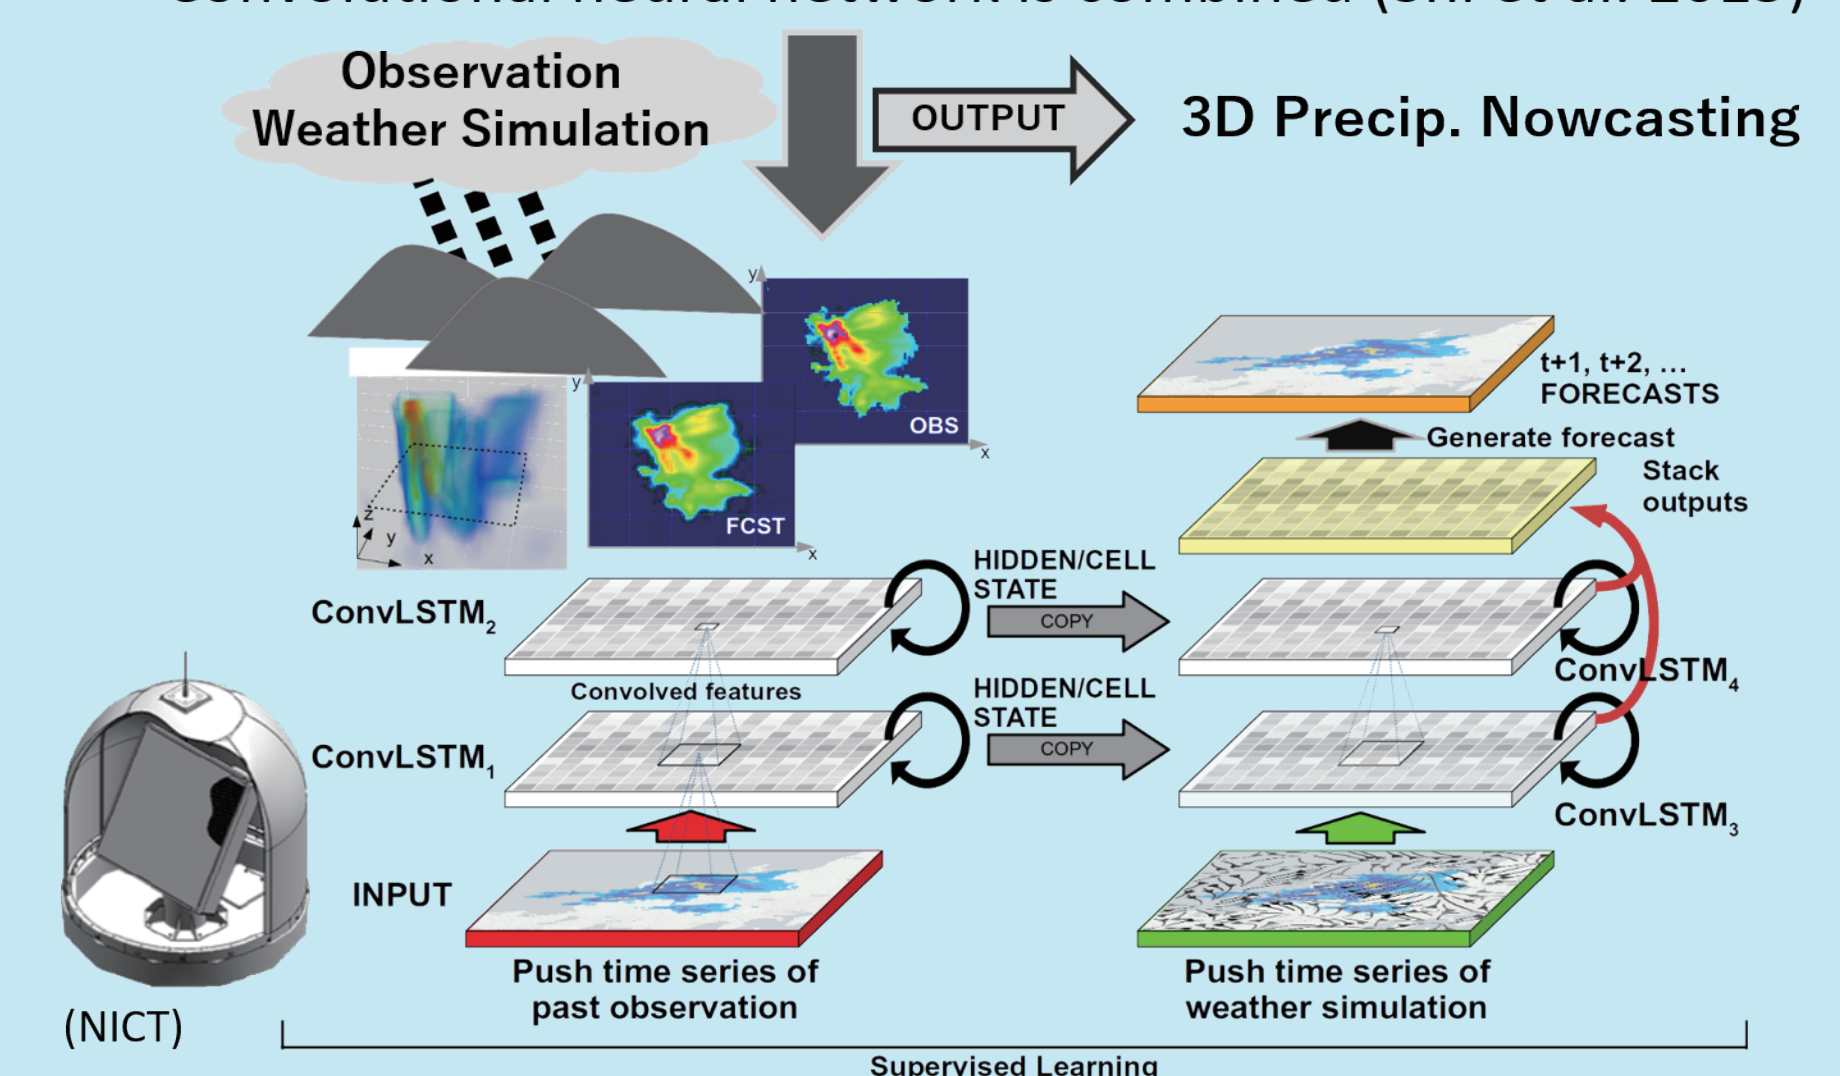

## 3. Test case

- Observation data: Kobe PAWR observations, 250-m mesh, 321x321x57 pixels
- Future data:
  - Optical flow-based 3D nowcast (TREC)
  - Surface precipitation forecast by SCALE-LETKF
- Training period:  
15:10:00-17:29:30 UTC, 10 June 2019
- Verification period:  
17:40:00-17:59:30 UTC, 10 June 2019
- 6 steps for the past data (encoder),  
20 steps for the future data (decoder)
  - Subregions of 61 x 61 x 9 pixels ( $z = 1.5\text{--}3.5\text{ km}$ ) with rain echoes are extracted from the original data, and are used for training and inference.
- Optimizer: Adam
- Loss function: Balanced mean square error
- Convolution kernel size: 3
- ConvLSTM1: 24 channels,  
ConvLSTM2: 3 channels

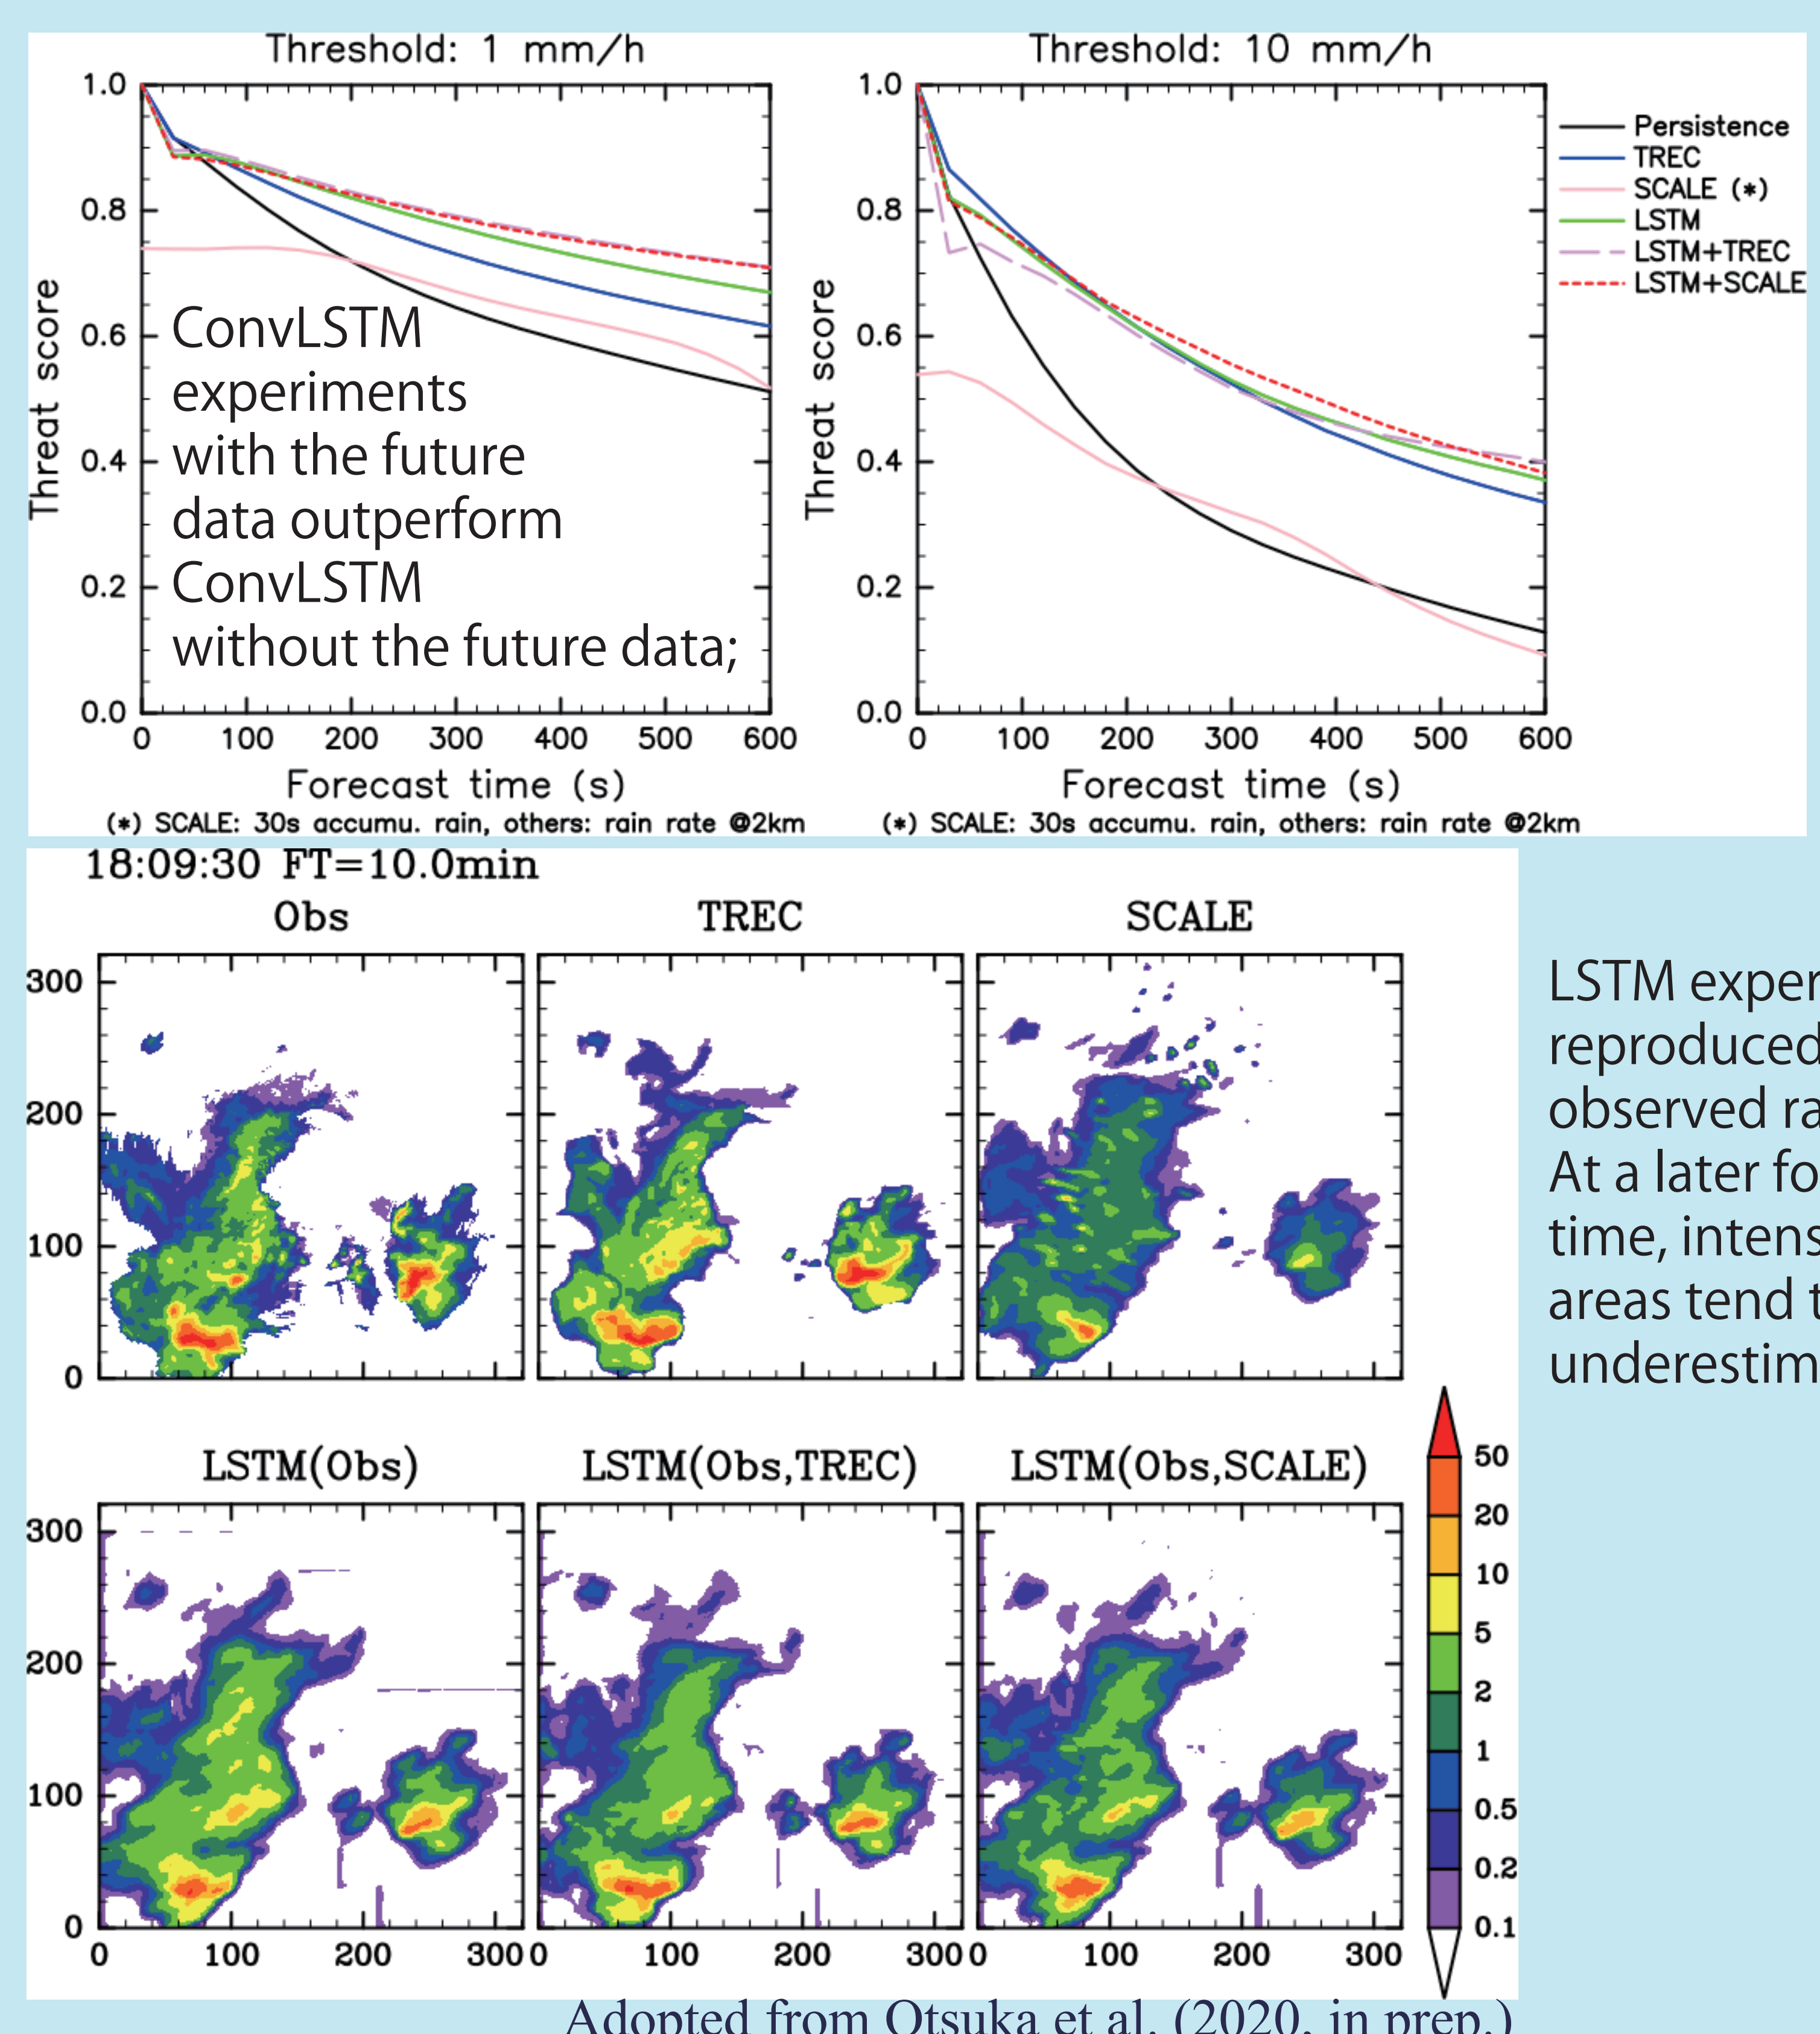

Adopted from Otsuka et al. (2020, in prep.)

LSTM experiments reproduced the observed rain well. At a later forecast time, intense rain areas tend to be underestimated.

## 5. Summary

- The Conv-LSTM is extended to 3D. A real-time 3D Conv-LSTM system is implemented with the Kobe PAWR.
- The 3D Conv-LSTM captured the evolution of convective cores.
- Conv-LSTM with forecast data outperformed that without forecast data.
- Future perspective: Training with PAWR data in different seasons / training with other model variables such as winds, humidity
- The machine learning architecture will be updated to improve the prediction accuracy.